

TEST REPORT

Report Reference No. : HK2509024997-1ER

Compiled by

(position+printed name+signature) : Testing engineer Len Liao

Len Liao

Supervised by

(position+printed name+signature) : Technique principal Sliver Wan

Sliver Wan

Approved by

(position+printed name+signature) : Manager Jason Zhou

Jason Zhou

Date of issue : 2025/09/12

Representative Laboratory Name : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : EDA Technology Shanghai Co.,Ltd

Address : Building 29, Shengchuang Enterprise Park, No.1661 Jialuo Road, Jiading District, Shanghai, PRC

Test specification:

Standard : ETSI EN 301 489-1 V2.2.3 (2019-11)/
ETSI EN 301 489-3 V2.3.2 (2023-01)/
ETSI EN 301 489-17 V3.3.1 (2024-09)/
ETSI EN 301 489-52 V1.3.1 (2024-11)/
EN 55032:2015 + A1:2020 + A11:2020/
EN 55035:2017 + A11:2020/
EN IEC 61000-3-2:2019 + A1:2021 + A2:2024/
EN 61000-3-3:2013 + A1:2019 + A2:2021

TRF Originator : Shenzhen HUAK Testing Technology Co., Ltd.

Master TRF : Dated 2019-07

Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Product Name : ED-HMI3100

Trade Mark : EDATEC

Product Model : ED-HMI3120-101C

Serial Model : ED-HMI3120-070C

Hardware Version : V1.3

Software Version : Debian 12

Rating : DC 12V From Adapter

Result : **PASS**

TEST REPORT

Test Report No. :	HK2509024997-1ER	2025/09/12
		Date of issue

Product Name : ED-HMI3100

Product Model : ED-HMI3120-101C

Serial Model : ED-HMI3120-070C

Applicant : EDA Technology Shanghai Co.,Ltd

Address : Building 29, Shengchuang Enterprise Park, No.1661 Jialuo Road, Jiading District, Shanghai, PRC

Manufacturer : EDA Technology Shanghai Co.,Ltd

Address : Building 29, Shengchuang Enterprise Park, No.1661 Jialuo Road, Jiading District, Shanghai, PRC

Test Result according to the standards on page 5:	PASS
---	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Issued History ****

Revision	Description	Issued Date	Remark
Revision 1.0	Initial Test Report Release	2025/09/12	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Contents

1.	<u>TEST STANDARDS</u>	5
2.	<u>SUMMARY</u>	6
2.1.	General Remarks	6
2.2.	Product Description	6
2.3.	Equipment under Test	7
2.4.	Short description of the Equipment under Test (EUT)	7
2.5.	EUT operation mode	8
2.6.	EUT configuration	8
2.7.	Performance level	9
2.8.	Modifications	10
3.	<u>TEST ENVIRONMENT</u>	11
3.1.	Information of the Test Laboratory	11
3.2.	Environmental conditions	11
3.3.	Configuration of Tested System	12
3.4.	Test Description	13
3.5.	Statement of the measurement uncertainty	13
3.6.	Equipments Used during the Test	14
4.	<u>TEST CONDITIONS AND RESULTS</u>	16
4.1.	REQUIREMENTS	16
4.1.1.	Radiated Emission	16
4.1.2.	Conducted Emission (AC Mains)	22
4.1.3.	Conducted Emission (Telecommunication Ports)	25
4.1.4.	Harmonic Current Emission	28
4.1.5.	Voltage Fluctuation and Flicker	29
4.1.6.	Electrostatic Discharge	31
4.1.7.	RF Electromagnetic Field	34
4.1.8.	Fast Transients Common Mode	38
4.1.9.	Surges, Line to Line and Line to Ground	40
4.1.10.	RF- Common Mode 0.15MHz to 80MHz	42
4.1.11.	Voltage Dips and Interruptions	45
5.	<u>TEST SET-UP PHOTOS OF THE EUT</u>	46
6.	<u>PHOTOS OF THE EUT</u>	50

1. TEST STANDARDS

The tests were performed according to following standards:

[ETSI EN 301 489-1 V2.2.3 \(2019-11\)](#)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU

[ETSI EN 301 489-3 V2.3.2 \(2023-01\)](#)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

[ETSI EN 301 489-17 V3.3.1 \(2024-09\)](#)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility

[ETSI EN 301 489-52 V1.3.1 \(2024-11\)](#)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 52: Specific conditions for Cellular Communication Mobile and portable (UE) radio and ancillary equipment; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

[EN 55032:2015 + A1:2020 + A11:2020](#) Electromagnetic compatibility of multimedia equipment – Emission Requirements

[EN 55035:2017 + A11:2020](#) Electromagnetic compatibility of multimedia equipment – Immunity requirements

[EN IEC 61000-3-2:2019 + A1:2021 + A2:2024](#) Electromagnetic compatibility(EMC)-Part 3-2:Limits-Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)

[EN 61000-3-3:2013 + A1:2019 + A2:2021](#) Electromagnetic compatibility(EMC)-Part 3-3:Limits-Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated ≤ 16 A per phase and not subject to conditional connection

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	2025/09/02
Testing commenced on	:	2025/09/02
Testing concluded on	:	2025/09/12

2.2. Product Description

Name of EUT	ED-HMI3100
Model(s) Number	ED-HMI3120-101C
List Models	ED-HMI3120-070C
Difference description	The main difference between different models is that the size of the LCD screen is not the same, and the maximum size is tested.
Hardware version	V1.3
Software version	Debian 12
Antenna Type	External Antenna

2.3. Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/>	120V / 60 Hz	<input type="radio"/>	115V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 12V From Adapter

2.4. Short description of the Equipment under Test (EUT)

For details, refer to the user's manual of EUT.

2.5. EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

Test Item	
EMI	
Mode 1	Working
EMS	
Mode 1	Working

2.6. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - Supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
<input type="radio"/>		Shield :	/
<input type="radio"/>		Detachable :	/

● Adapter information

Input: AC 100-240V, 50/60Hz, 0.6A
Output: DC 12V, 2A, 24W
Model: KSASB0241200200D5

2.7. Performance level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test relative to a performance criteria defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product. Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access(hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution
- quality of data display and transmission
- quality of speech transmission

General performance criteria

- based on the used product standard
- based on the declaration of the manufacturer, requestor or purchaser
- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time. The equipment shall meet the minimum performance criteria as specified in the following clauses.

Performance table

Table 1: Performance criteria

Criteria	During test	After test
A	Shall operate as intended. May show degradation of performance (see note 1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 2). Shall be no loss of function. Shall be no loss of stored data or user programmable functions.
B	May show loss of function (one or more). May show degradation of performance (see note 1). No unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2).
<p>NOTE 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance.</p> <p>If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.</p> <p>NOTE 2: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.</p>		

Performance criteria for Continuous phenomena applied to Transmitters (CT)

The performance criteria A shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an ACKnowledgement (ACK) or Not ACKnowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

Performance criteria for Transient phenomena applied to Transmitters (TT)

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

Performance criteria for Continuous phenomena applied to Receivers (CR)

The performance criteria A shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

Performance criteria for Transient phenomena applied to Receivers (TR)

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

2.8. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35°C

Humidity: 30-60%

Atmospheric pressure: 950-1050mbar

3.3. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

Mode 1:

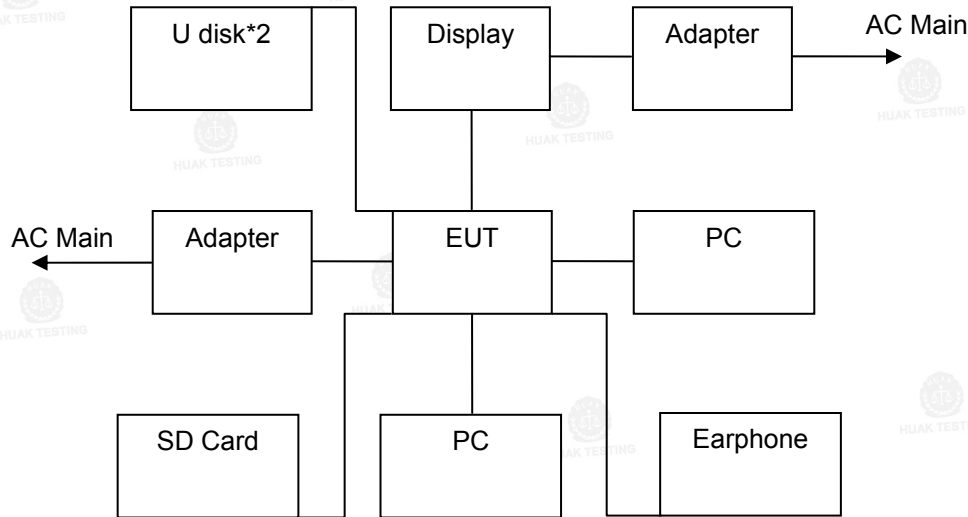


Table 2-1 Equipment Used in Tested System

No.	Product	Manufacture	Model No.	FCC ID
1	PC	Lenovo	ThinkPad E14	/
2	PC	Lenovo	ThinkPad L480	/
3	Display	PHILIPS	279E1	/
4	Adapter	N/A	ADPC2065	/
5	Earphone	N/A	N/A	/
6	SD Card	N/A	N/A	/
7	U disk	N/A	N/A	/
8	U disk	N/A	N/A	/

3.4. Test Description

ETSI EN 301 489-1/-3/-17/-52 requirements		
Radiated Emission	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.1 EN 55032:2015 + A1:2020 + A11:2020 Annex A.2	PASS
Conducted Emission(AC Mains)	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.1 EN 55032:2015 + A1:2020 + A11:2020 Annex A.3	PASS
Conducted Emission(Telecommunication Ports)	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.1 EN 55032:2015 + A1:2020 + A11:2020 Annex A.3	PASS
Harmonic Current Emissions	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.1 EN IEC 61000-3-2:2019 + A1:2021 + A2:2024	N/A
Voltage Fluctuations and Flicker	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.1 EN 61000-3-3:2013 + A1:2019 + A2:2021	PASS
Electrostatic Discharge	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.2	PASS
RF Electromagnetic Field	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.2	PASS
Fast Transients Common Mode	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.2	PASS
RF Common Mode 0,15 MHz to 80 MHz	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.2	PASS
Transients and Surges	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.2	N/A
Voltage Dips and Interruptions	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.2	PASS
Surges, Line to Line and Line to Ground	ETSI EN 301 489-1 V2.2.3 (2019-11) Clause 7.2	PASS

Remark: The measurement uncertainty is not included in the test result.

NOTE:

Equipment meeting Class A requirements may not offer adequate protection to broadcast services within a residential environment.

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAKE Testing Technology Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.90dB	(1)
Radiated Emission	1~18GHz	4.28dB	(1)
Radiated Emission	18-40GHz	5.54dB	(1)
Conducted Disturbance	0.15~30MHz	2.71dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

CONDUCTED EMISSION

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	HKE-002	Feb. 19, 2025	Feb. 18, 2026	1 year
2	LISN	R&S	ENV216	HKE-059	Feb. 19, 2025	Feb. 18, 2026	1 year
3	EMI Test Receiver	R&S	ESR	HKE-005	Feb. 19, 2025	Feb. 18, 2026	1 year
4	ISN	ETC	08-06-BAC-022-02	HKE-062	Feb. 19, 2025	Feb. 18, 2026	1 year
5	Conduction test software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/	/

RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Feb. 21, 2024	Feb. 20, 2026	2 year
2	EMI Test Receiver	R&S	ESR-7	HKE-010	Feb. 19, 2025	Feb. 18, 2026	1 year
3	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 19, 2025	Feb. 18, 2026	1 year
4	Horn antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	Feb. 20, 2026	2 year
5	Preamplifier	Schwarzbeck	EMC051845SE	HKE-015	Feb. 19, 2025	Feb. 18, 2026	1 year
6	Preamplifier	Agilent	83051A	HKE-016	Feb. 19, 2025	Feb. 18, 2026	1 year
7	Position controller	Taiwan MF	MF7802	HKE-011	Feb. 19, 2025	Feb. 18, 2026	1 year
8	Radiation test software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/	/

HARMONICS AND FILCK

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Harmonic flicker tester	California Instruments	AC2000A	HKE-037	Feb. 19, 2025	Feb. 18, 2026	1 year

ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	ESD device	TESEQ	NSG437	HKE-023	Feb. 19, 2025	Feb. 18, 2026	1 year

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

RS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Power amplifier	micotop	MPA-80-1000-250	HKE-142	Feb. 19, 2025	Feb. 18, 2026	1 year
2	Power amplifier	micotop	MPA-1000-6000-100	HKE-143	Feb. 19, 2025	Feb. 18, 2026	1 year
3	Power Meter	KEYSIGHT	E4419B	HKE-144	Feb. 19, 2025	Feb. 18, 2026	1 year
4	Vector signal generator	KEYSIGHT	N5182B	HKE-124	Feb. 19, 2025	Feb. 18, 2026	1 year
5	Field strength probe	NARDA	EP601	HKE-146	Feb. 19, 2025	Feb. 18, 2026	1 year
6	High gain antenna	Schwarzbeck	STPL9129	HKE-147	Feb. 20, 2024	Feb. 19, 2026	2 year
7	RS Test Software	Tonscend	JS35-RS 5.0.0	HKE-186	/	/	/

SURGE, EFT/BURST, VOLTAGE INTERRUPTION/DIPS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Full-featured immunity tester	TESEQ	NSG3060	HKE-036	Feb. 19, 2025	Feb. 18, 2026	1 year
2	Group pulse coupling clamp	TESEQ	CDN 8014	HKE-024	Feb. 19, 2025	Feb. 18, 2026	1 year

INJECTION CURRENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Sensitivity Test System	SCHLODER	CDG6000	HKE-033	Feb. 19, 2025	Feb. 18, 2026	1 year
2	Magnetic clamp	TESEQ	KEMA 801	HKE-114	Feb. 19, 2025	Feb. 18, 2026	1 year
3	Coupling decoupling network	TESEQ	CDN-M2+M3	HKE-032	Feb. 19, 2025	Feb. 18, 2026	1 year

PFMF

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Power frequency magnetic field testing system	LIONCEL	PMF-801C-C	HKE-115	Feb. 19, 2025	Feb. 18, 2026	1 year

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4. TEST CONDITIONS AND RESULTS

4.1. REQUIREMENTS

4.1.1. Radiated Emission

LIMIT

Please refer to ETSI EN 301 489-1 Clause 8.2.3


The ancillary equipment shall meet the class B limits given in CENELEC EN 55032 [1], annex A tables A.4 and A.5.

Alternatively, for ancillary equipment intended to be used exclusively in an industrial environment or telecommunication centres, the class A limits given in CENELEC EN 55032 [1], annex A tables A.2 and A.3 may be used.


If EUT is also a FM Receiver, it shall meet CENELEC EN 55032 [3], annex A tables A.6

TEST CONFIGURATION

(a) Radiated Emission Test Set-Up, Frequency below 1000MHz

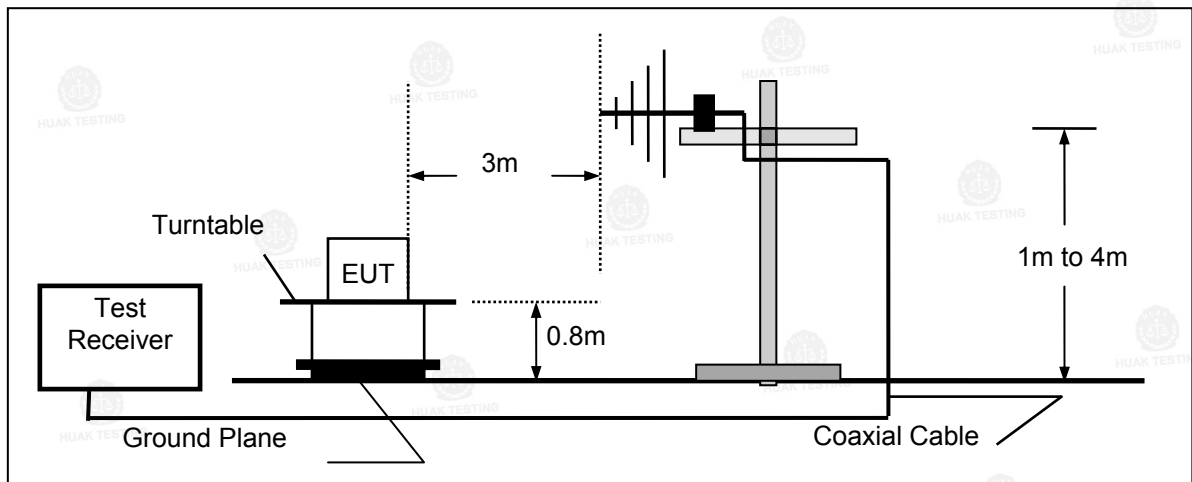

(b) Radiated Emission Test Set-Up, Frequency above 1000MHz

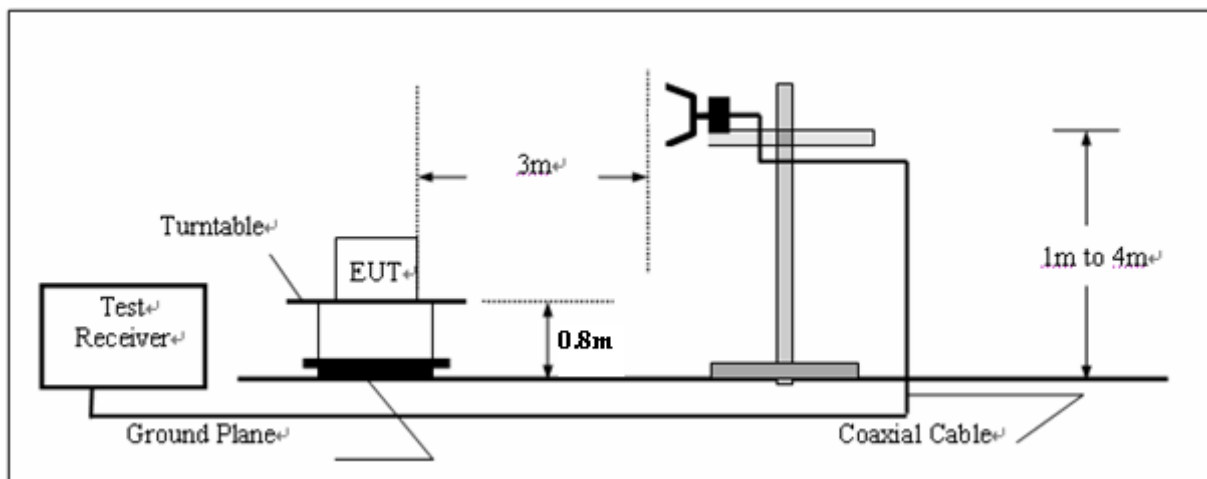

TEST PROCEDURE


Please refer to ETSI EN 301 489-1 Clause 8.2.2 and The test method shall be in accordance with CENELEC EN 55032 [1], annex A.2. for the measurement methods.

Climatic conditions

- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

Below 1000MHz

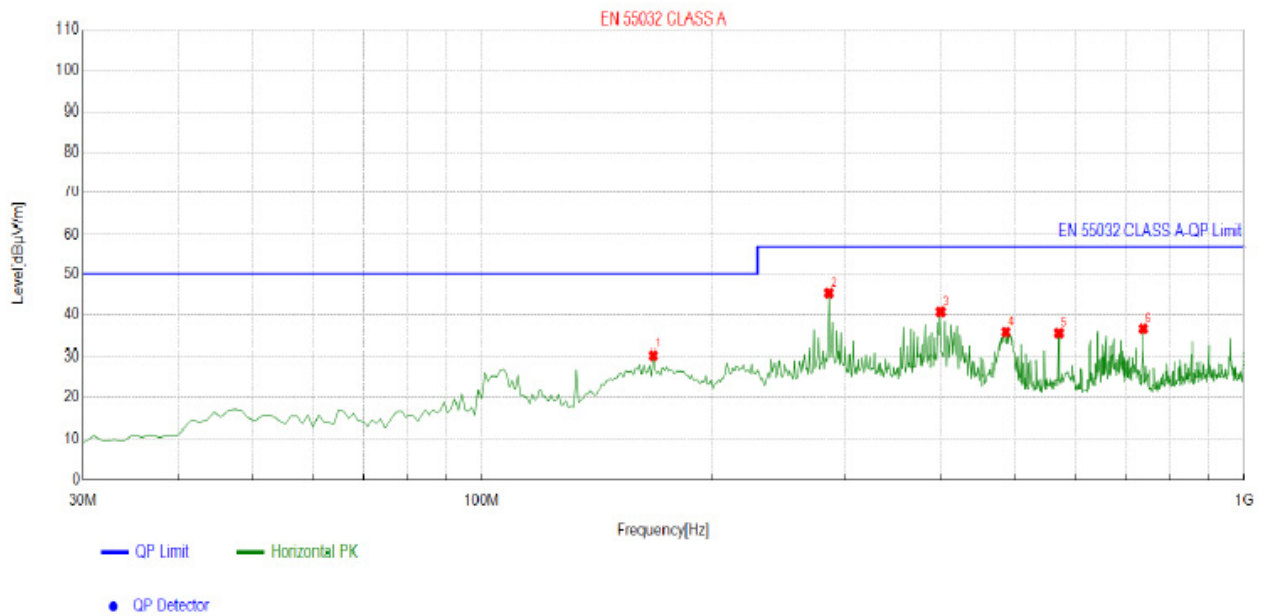


Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	167.8779	-17.31	47.76	30.45	50.00	19.55	100	184	Horizontal
2	285.3654	-12.45	57.76	45.31	57.00	11.69	100	260	Horizontal
3	399.9399	-9.84	50.54	40.70	57.00	16.30	100	322	Horizontal
4	487.3273	-7.91	43.72	35.81	57.00	21.19	100	15	Horizontal
5	571.8018	-5.71	41.25	35.54	57.00	21.46	100	328	Horizontal
6	737.8378	-3.45	40.05	36.60	57.00	20.40	100	166	Horizontal

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

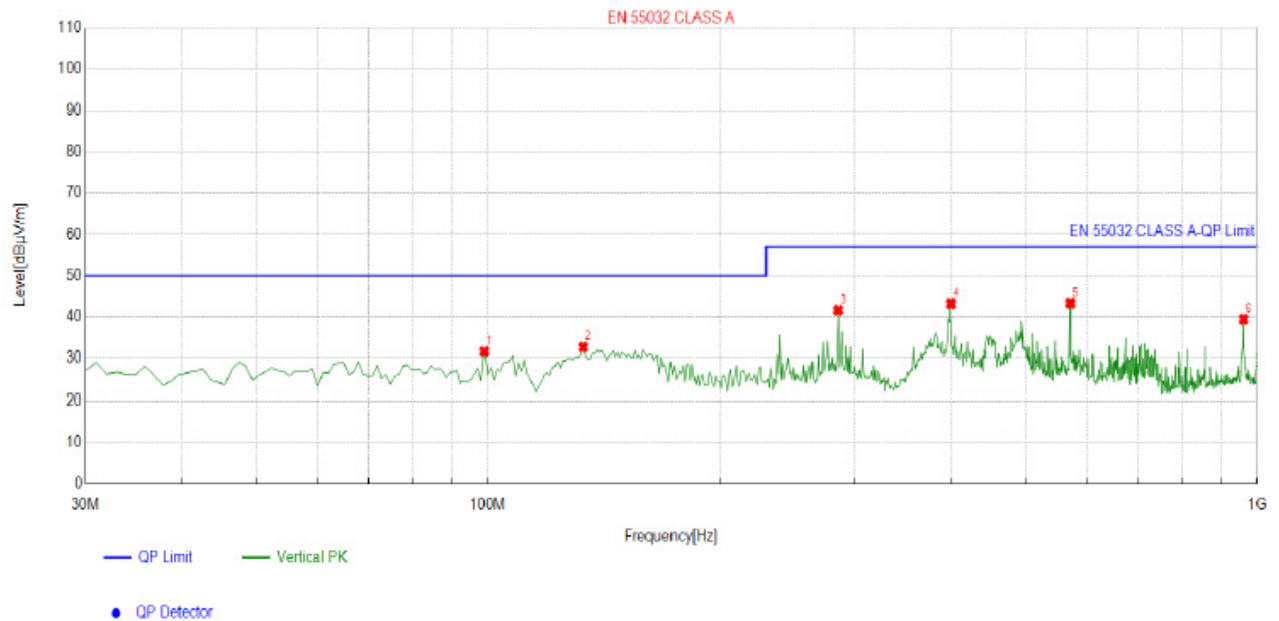


Suspected List

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	98.9389	-14.83	46.56	31.73	50.00	18.27	100	243	Vertical
2	132.9229	-17.24	50.03	32.79	50.00	17.21	100	20	Vertical
3	285.3654	-12.45	54.09	41.64	57.00	15.36	100	160	Vertical
4	399.9399	-9.84	53.06	43.22	57.00	13.78	100	308	Vertical
5	571.8018	-5.71	49.05	43.34	57.00	13.66	100	1	Vertical
6	960.1902	-0.54	39.99	39.45	57.00	17.55	100	188	Vertical


Remark:

Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Radiated Emission From 1 GHz to 6 GHz

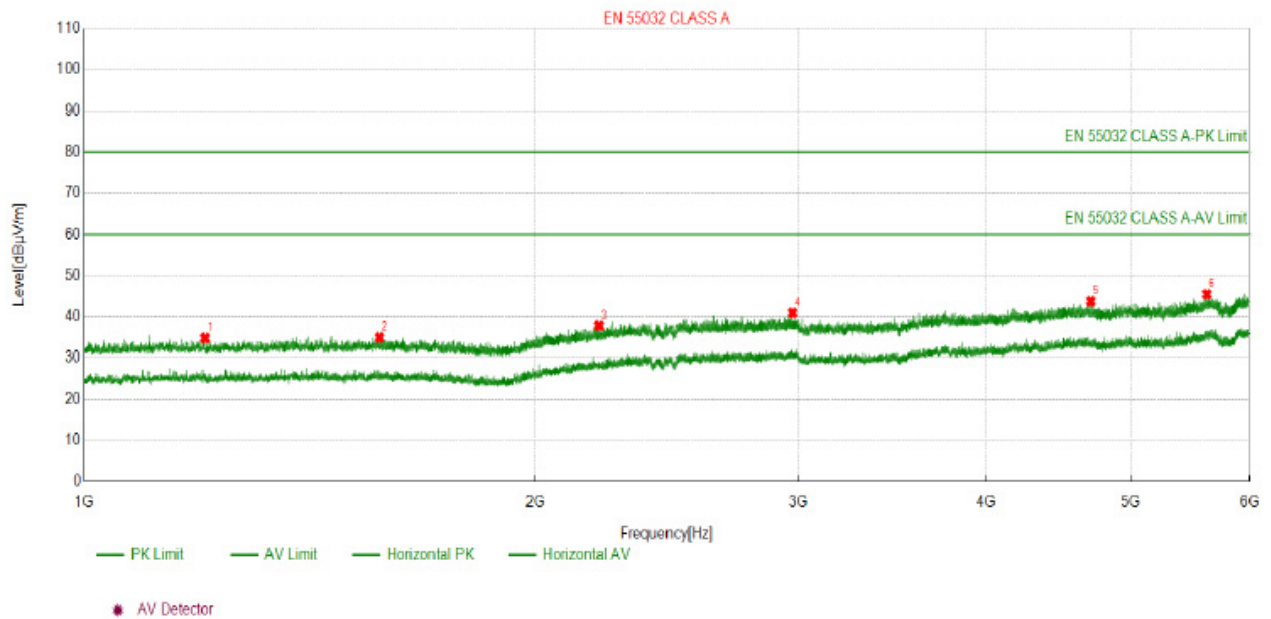

Suspected Data List								
NO.	Freq. [MHz]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1204.020	34.84	-19.85	80.00	45.16	100	2	Horizontal
2	1574.657	34.97	-18.73	80.00	45.03	100	246	Horizontal
3	2206.320	37.85	-15.68	80.00	42.15	100	115	Horizontal
4	2970.597	40.96	-13.25	80.00	39.04	100	214	Horizontal
5	4697.869	43.80	-9.97	80.00	36.20	100	239	Horizontal
6	5615.961	45.47	-8.13	80.00	34.53	100	180	Horizontal

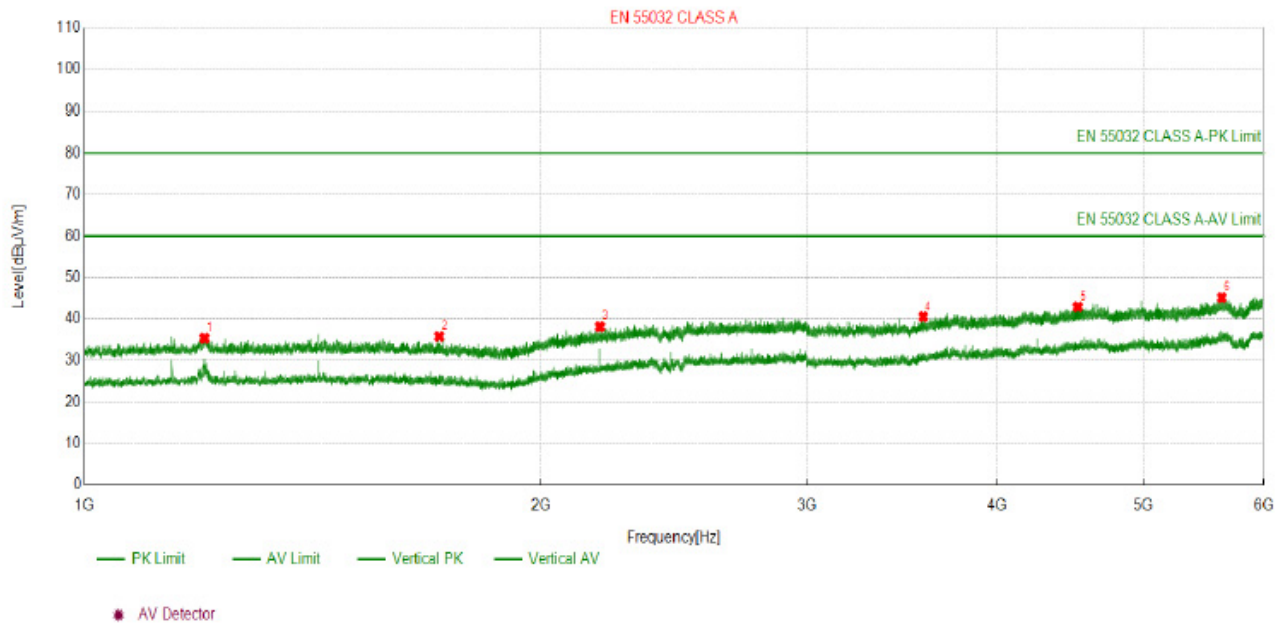

Suspected Data List								
NO.	Freq. [MHz]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1199.820	35.33	-19.87	80.00	44.67	100	212	Vertical
2	1714.071	35.78	-18.40	80.00	44.22	100	74	Vertical
3	2188.318	38.13	-15.82	80.00	41.87	100	22	Vertical
4	3576.657	40.50	-13.24	80.00	39.50	100	331	Vertical
5	4523.252	42.91	-10.37	80.00	37.09	100	150	Vertical
6	5627.362	45.15	-8.04	80.00	34.85	100	150	Vertical

Remark:

Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

4.1.2. Conducted Emission (AC Mains)

LIMIT


Please refer to ETSI EN 301 489-1 Clause 8.4.3

The equipment shall meet the class B limits given in CENELEC EN 55032 [1], annex A table A.10.

Alternatively, for equipment intended to be used in an industrial environment or a telecommunication centre, the class A limits given in CENELEC EN 55032 [1], annex A table A.9 can be used.

If EUT is also a FM Receiver, it shall meet CENELEC EN 55032 [3], annex A tables A.13

TEST CONFIGURATION

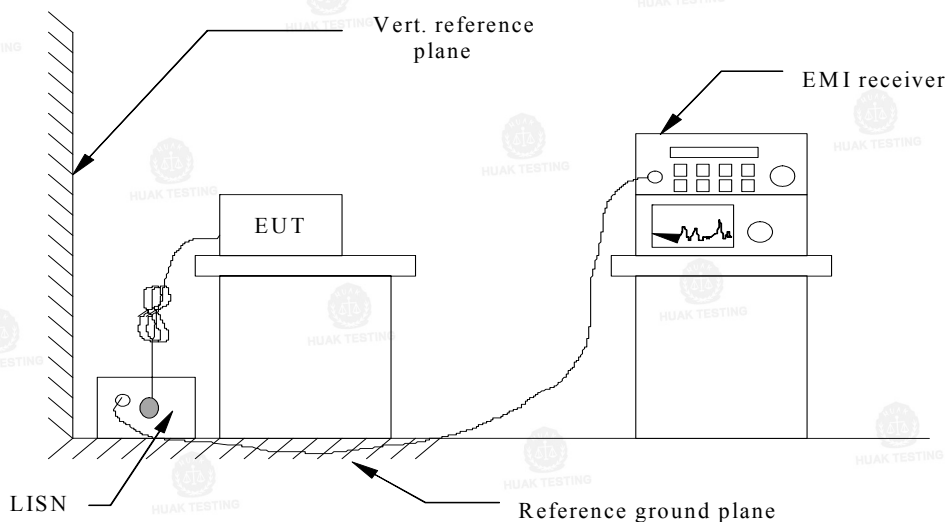


TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 8.4.3 and EN 55032 Clause 5 for the measurement methods.

Climatic conditions


- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

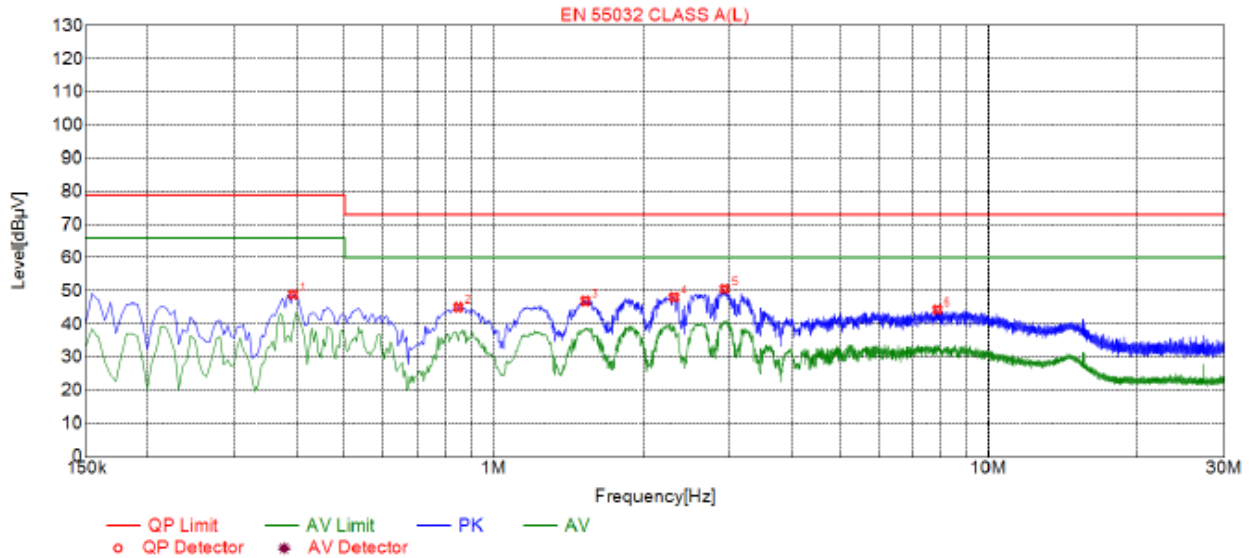

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.3930	48.82	19.84	79.00	30.18	28.98	PK	L
2	0.8475	45.08	19.71	73.00	27.92	25.37	PK	L
3	1.5315	46.96	19.97	73.00	26.04	26.99	PK	L
4	2.3145	48.03	20.20	73.00	24.97	27.83	PK	L
5	2.9310	50.56	20.26	73.00	22.44	30.30	PK	L
6	7.8810	44.43	20.62	73.00	28.57	23.81	PK	L

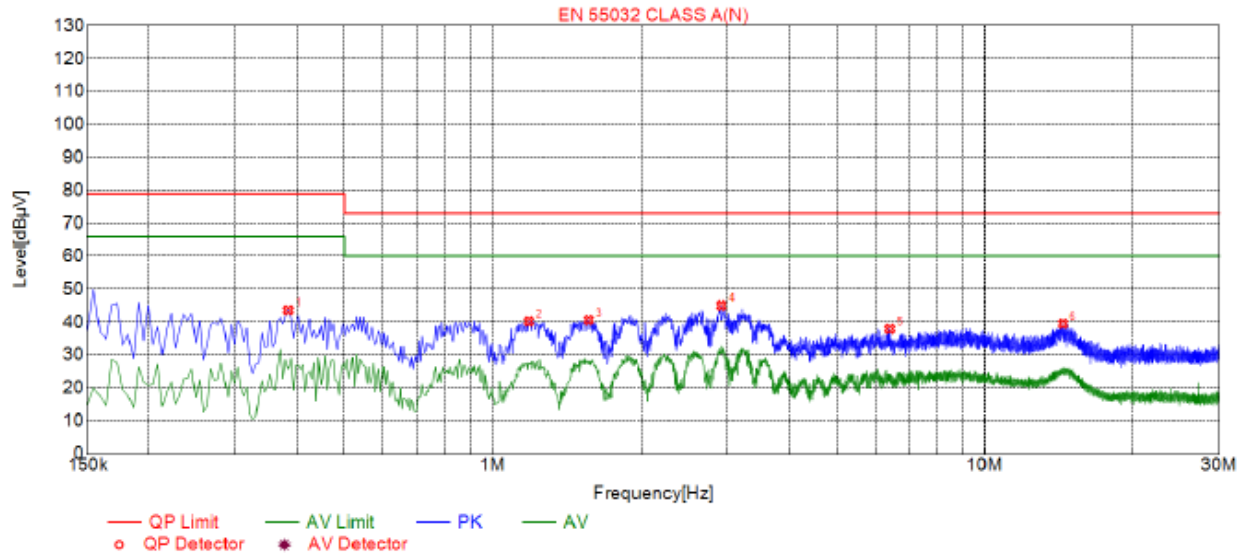

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.3840	43.64	19.71	79.00	35.36	23.93	PK	N
2	1.1850	40.21	19.81	73.00	32.79	20.40	PK	N
3	1.5675	40.60	19.87	73.00	32.40	20.73	PK	N
4	2.9175	45.03	20.06	73.00	27.97	24.97	PK	N
5	6.4140	37.87	20.44	73.00	35.13	17.43	PK	N
6	14.4330	39.48	21.65	73.00	33.52	17.83	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

4.1.3. Conducted Emission (Telecommunication Ports)


LIMIT

Please refer to ETSI EN 301 489-1 Clause 8.7.3

The wired network ports shall meet the class B limits given in CENELEC EN 55032 [1], annex A table A.12.

Alternatively, for equipment intended to be used exclusively in an industrial environment or a telecommunication centre, the class A limits given in CENELEC EN 55032 [1] annex A table A.11 can be used.

TEST CONFIGURATION

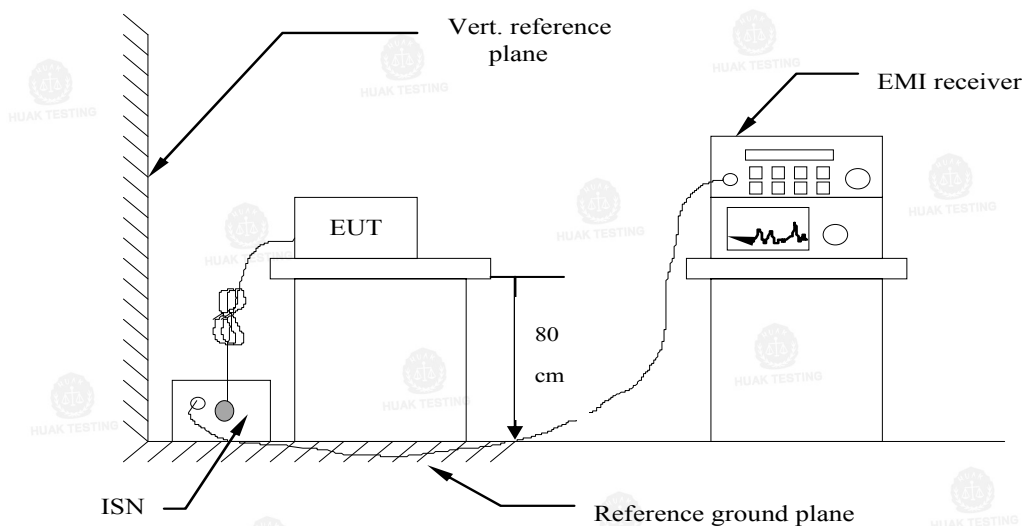

TEST PROCEDURE


Please refer to ETSI EN 301 489-1 Clause 8.7.2 and The test method shall be in accordance with CENELEC EN 55032 [1], annex A.3. for the measurement methods.

Climatic conditions

- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

100M

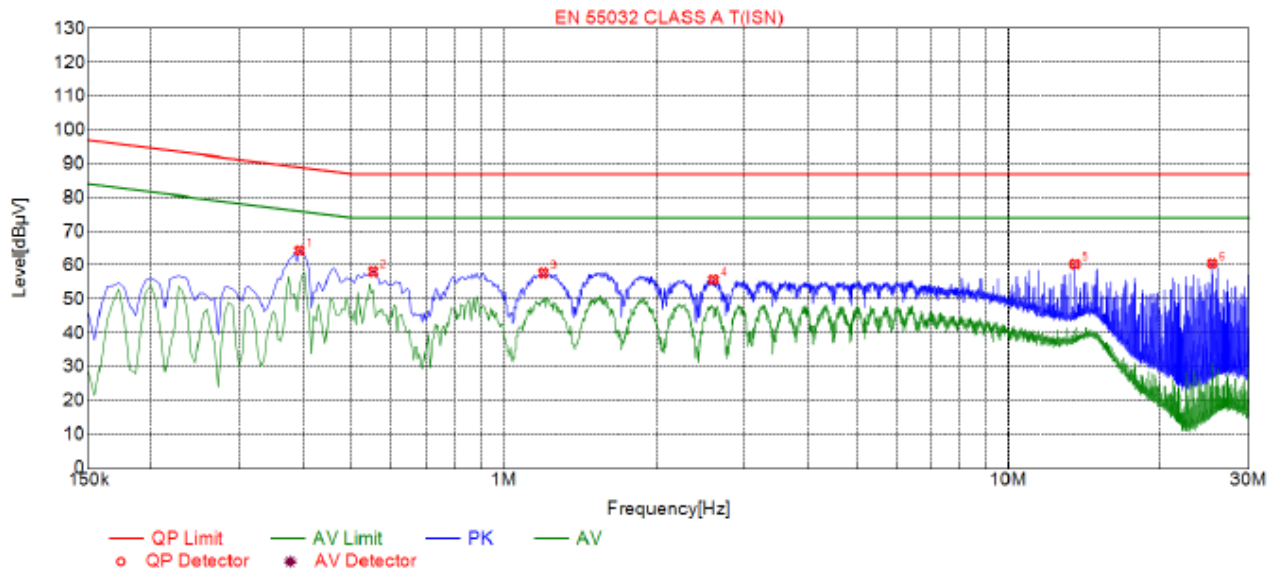

Suspected List


NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.3930	64.42	20.11	76.00	11.58	44.31	PK	ISN
2	0.5505	58.15	20.03	74.00	15.85	38.12	PK	ISN
3	1.1985	57.72	19.85	74.00	16.28	37.87	PK	ISN
4	2.6025	55.83	19.79	74.00	18.17	36.04	PK	ISN
5	13.5555	60.27	19.46	74.00	13.73	40.81	PK	ISN
6	25.3410	60.47	19.84	74.00	13.53	40.63	PK	ISN

Remark: Margin = Limit – Level

Correction factor = Cable lose + ISN insertion loss

Level=Test receiver reading + correction factor

1000M

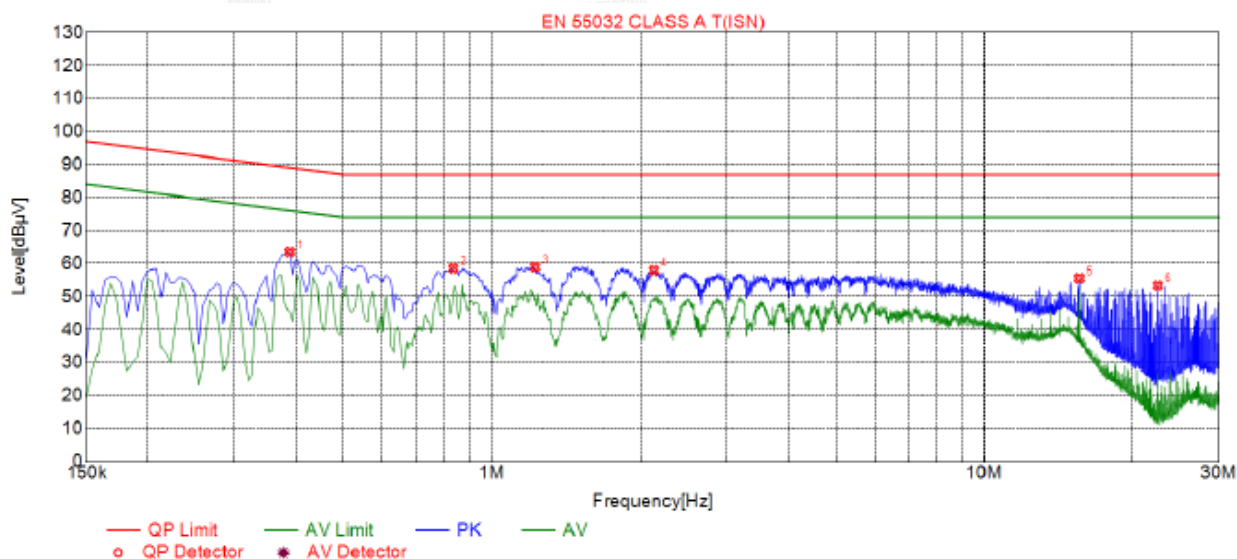

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.3885	63.50	20.12	76.10	12.60	43.38	PK	ISN
2	0.8340	58.55	19.92	74.00	15.45	38.63	PK	ISN
3	1.2255	58.94	19.84	74.00	15.06	39.10	PK	ISN
4	2.1345	57.94	19.75	74.00	16.06	38.19	PK	ISN
5	15.6030	55.61	19.47	74.00	18.39	36.14	PK	ISN
6	22.5330	53.38	19.72	74.00	20.62	33.66	PK	ISN

Remark: Margin = Limit – Level

Correction factor = Cable lose + ISN insertion loss


Level=Test receiver reading + correction factor

4.1.4. Harmonic Current Emission

LIMIT

Please refer to EN IEC 61000-3-2

TEST CONFIGURATION

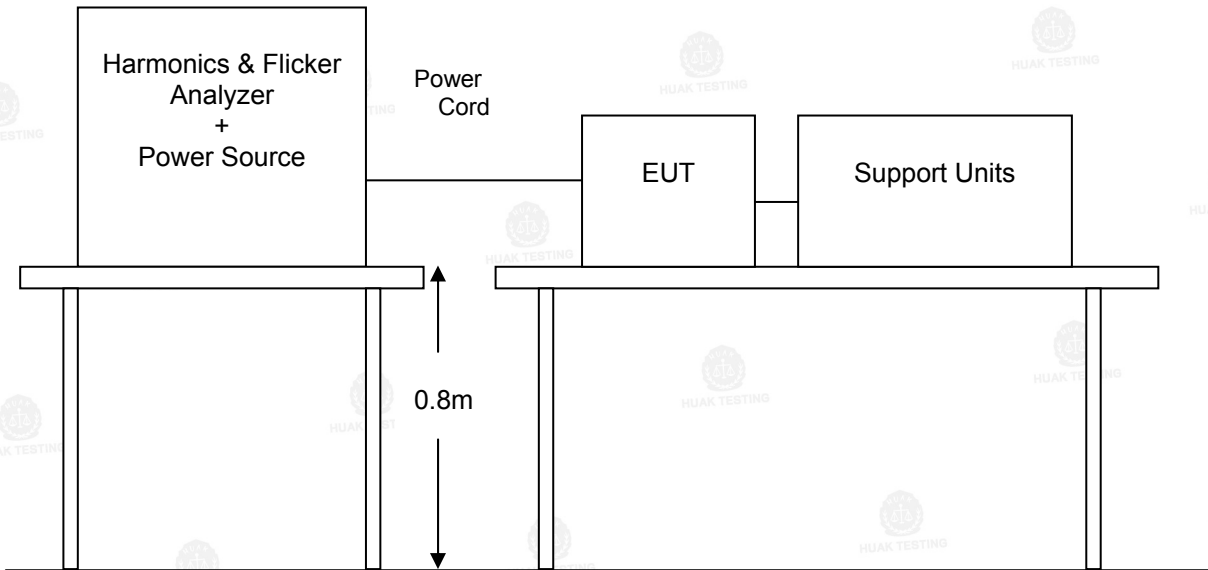

TEST PROCEDURE

Please refer to EN IEC 61000-3-2 for the measurement methods.

Climatic conditions

- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

EUT power is less than 75W, so this test report is not applicable.

4.1.5. Voltage Fluctuation and Flicker

LIMIT

Please refer to EN 61000-3-3

TEST CONFIGURATION

Same as the configuration of the Harmonic Current Emission.


TEST PROCEDURE

Please refer to EN 61000-3-3 for the measurement methods.

Climatic conditions

- ambient temperature : 25℃
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

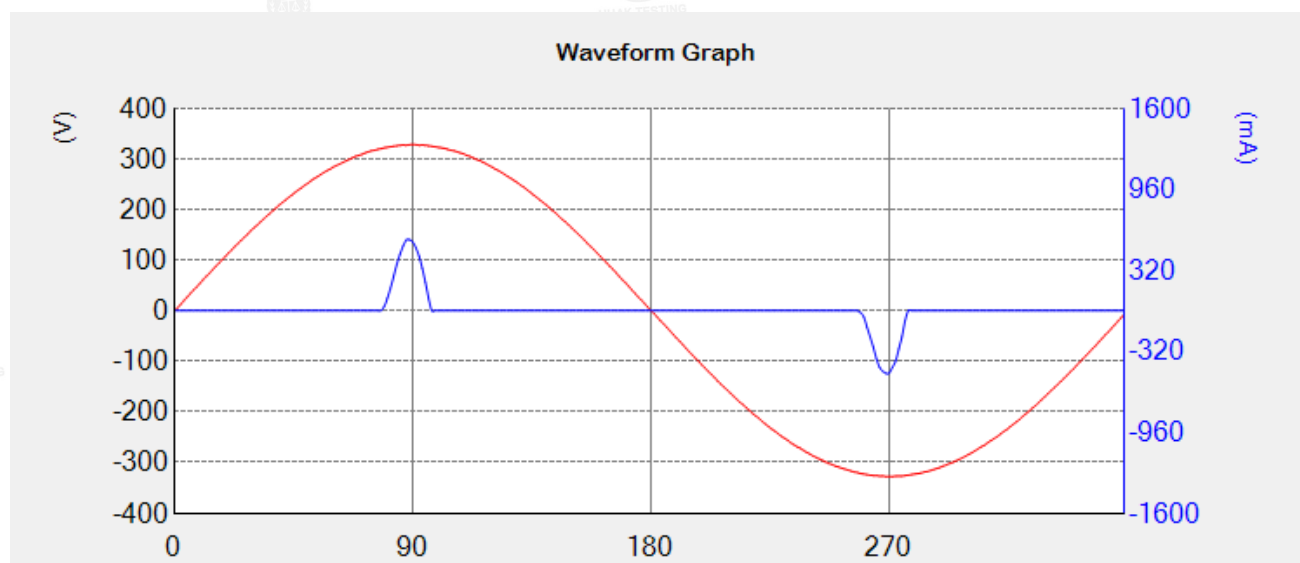

Voltage Fluctuations & Flicker		Additional	
	Measured	Limit	Status
dmax	0.00%	4%	pass
Tmax	0ms	500ms	pass
Maximun dc	0.00%	3.3%	pass
	0.02		
Plt	0.00	0.65	pass

4.1.6. Electrostatic Discharge

LIMIT

Please refer to EN 61000-4-2


SEVERITY LEVELS OF ELECTROSTATIC DISCHARGE

Test level: Contact Discharge at $\pm 2\text{KV}, \pm 4\text{KV}$ Air Discharge at $\pm 2\text{KV}, \pm 4\text{KV}, \pm 8\text{KV}$

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1	2	2
2	4	4
3	6	8
4	8	15
X	Special	Special

Performance criterion: **B**

Test Configuration

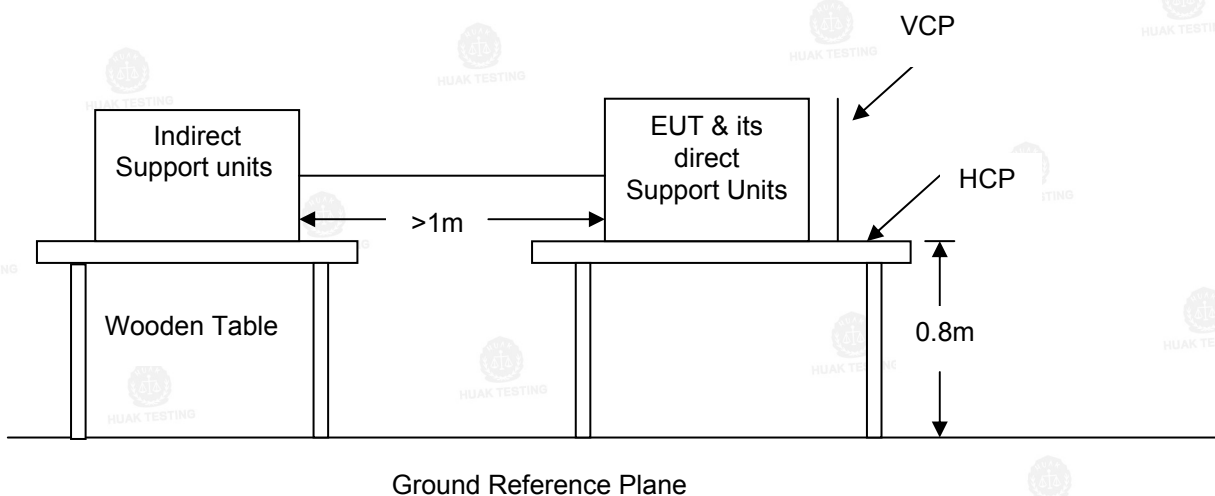

Test procedure

Please refer to ETSI EN 301 489-1 Clause 9.3.2 and EN 61000-4-2 for the measurement methods.

If EUT is also a FM Receiver, it shall refer to EN 55020:2007/A11:2011 Clause 5.9 for the measurement methods.

Test results

Contact Discharge:

The ESD generator is held perpendicular to the surface to which the discharge is applied and the tip of the discharge electrode touch the surface of EUT. Then turn the discharge switch. The generator is then re-triggered for a new single discharge and repeated at least 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

Air Discharge:

Air discharge is used where contact discharge can't be applied. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated at least 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Indirect discharge for horizontal coupling plane:

At least 10 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT.

Indirect discharge for vertical coupling plane:

At least 10 single discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

Climatic conditions

- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

Mode	Air Discharge								Contact Discharge								Criterion	Result
Test level (kV)	4		8		10		15		2		4		6		8			
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
HCP									A	A	A	A					B	PASS
VCP									A	A	A	A						PASS
Metallic parts									A	A	A	A						PASS
enclosure	A	A	A	A														PASS
slot	A	A	A	A														PASS

Note:


- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:
Direct / Indirect (HCP/VCP) discharges: Minimum 50 times (Positive/Negative) at each point. Air discharges: Minimum 10 times (Positive/Negative) at each point.
- 3) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)
- 4) The Indirect (HCP/VCP) discharges description of test point as following:
1.left side 2.right side 3.front side 4.rear side
- 5) N/A - denotes test is not applicable in this test report

4.1.7. RF Electromagnetic Field

LIMIT

Please refer to EN IEC 61000-4-3

Test Configuration

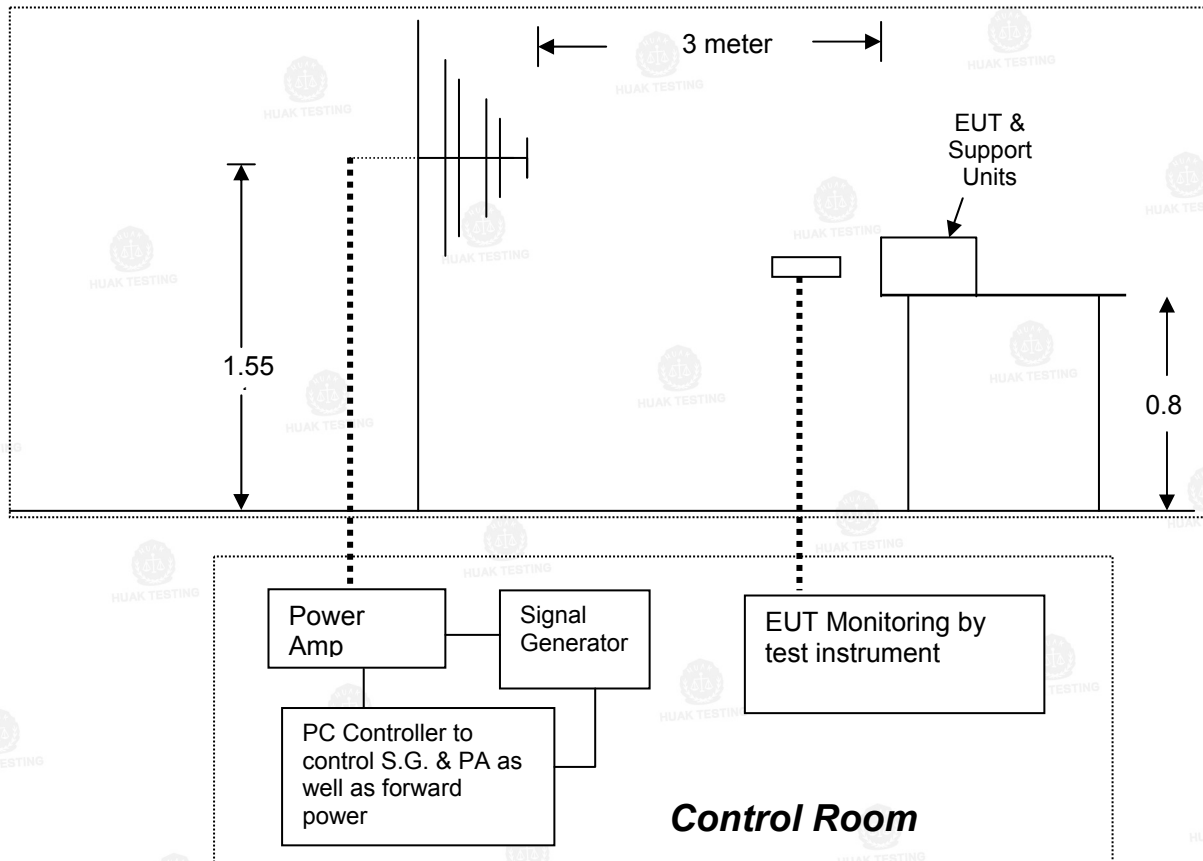

Test Levels of RF Electromagnetic Field

Test level: RF Field Strength: 3V/m

Level	RF Field Strength(V/m)
1	1
2	3
3	10
X	Special

Performance criterion: **A**

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.2.2 and EN IEC 61000-4-3 for the measurement methods.

Climatic conditions

- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

	Freq. Range (MHz)	Field	Modulation	Polarity	Position	Mode	Result (Pass/Fail)
1	80-6000	3V/m	Yes	H / V	Front	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Front		Pass
2	80-6000	3V/m	Yes	H / V	Right	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Right		Pass
3	80-6000	3V/m	Yes	H / V	Back	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Back		Pass
4	80-6000	3V/m	Yes	H / V	Left	Normal Operating	Pass
	1800(±1%), 2600(±1%), 3500(±1%), 5000(±1%)	3V/m	Yes	H / V	Left		Pass

Test mode:	LTE Band 1	Frequency range:	80MHz~6GHz
------------	------------	------------------	------------

Throughput:

Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.38	95	Pass

Test mode:	LTE Band 3	Frequency range:	80MHz~6GHz
------------	------------	------------------	------------

Throughput:

Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.85	95	Pass

Test mode:	LTE Band 7	Frequency range:	80MHz~6GHz
------------	------------	------------------	------------

Throughput:

Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.47	95	Pass

Test mode:	LTE Band 8	Frequency range:	80MHz~6GHz
------------	------------	------------------	------------

Throughput:

Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.22	95	Pass

Test mode:	LTE Band 20	Frequency range:	80MHz~6GHz
------------	-------------	------------------	------------

Throughput:

Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.86	95	Pass

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Test mode:	LTE Band 28			Frequency range:	80MHz~6GHz	
Throughput:						
Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.29	95	Pass

Test mode:	LTE Band 38			Frequency range:	80MHz~6GHz	
Throughput:						
Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.53	95	Pass


Test mode:	LTE Band 40			Frequency range:	80MHz~6GHz	
Throughput:						
Freq. Range (MHz)	Field	Modulation Depth	Polarity	Throughput:(%)	Throughput Limit(%)	Result
80-6000	3V/m	80%	H / V	97.64	95	Pass

4.1.8. Fast Transients Common Mode

LIMIT

Please refer to EN 61000-4-4

TEST CONFIGURATION

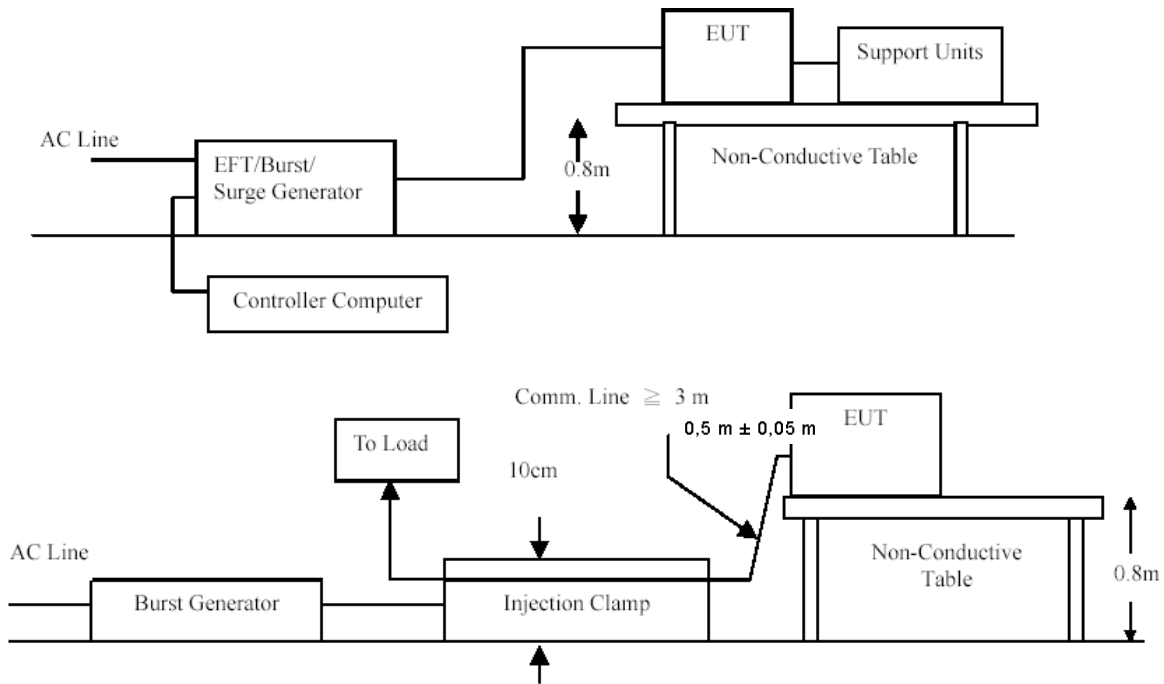

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.4.2 and EN 61000-4-4 for the measurement methods.

If EUT is also a FM Receiver, it shall refer to EN 55020:2007/A11:2011 Clause 5.6 for the measurement methods.

Climatic conditions

- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

Coupling Line		Test level (kV)								Criterion	Result
		0.5		1		2		4			
		+	-	+	-	+	-	+	-		
AC line	L	A	A	A	A					B	PASS
	N	A	A	A	A						PASS
	PE										
	L+N	A	A	A	A						PASS
	L+PE										
	N+PE										
	L+N+PE										
DC Line											
Signal Line		A	A								PASS


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4.1.9. Surges, Line to Line and Line to Ground

LIMIT

Please refer to EN 61000-4-5

TEST CONFIGURATION

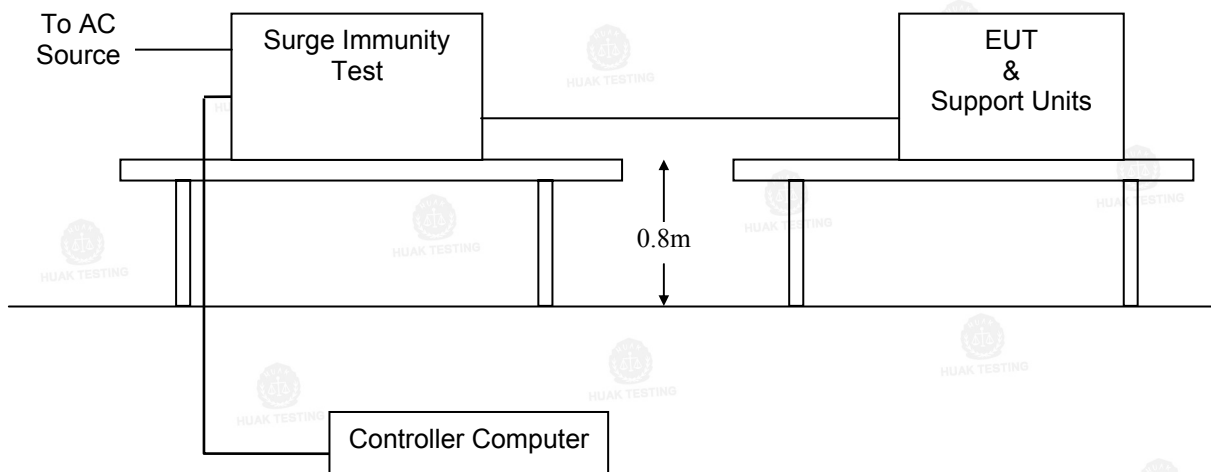

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.4.2 and EN 61000-4-5 for the measurement methods.

Climatic conditions

- ambient temperature : 25℃
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

Coupling Line			Test level								Criterion	Result
			0.5 kV		1 kV		2 kV		4 kV			
			+	-	+	-	+	-	+	-		
AC line	L-N	0°	A	A	A	A					B	PASS
		90°	A	A	A	A						
		180°	A	A	A	A						
		270°	A	A	A	A						
	L-PE	0°										
		90°										
		180°										
		270°										
	N-PE	0°										
		90°										
		180°										
		270°										
DC Line												
Signal Line			A	A							PASS	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4.1.10. RF- Common Mode 0.15MHz to 80MHz

LIMIT

Please refer to EN IEC 61000-4-6

TEST CONFIGURATION

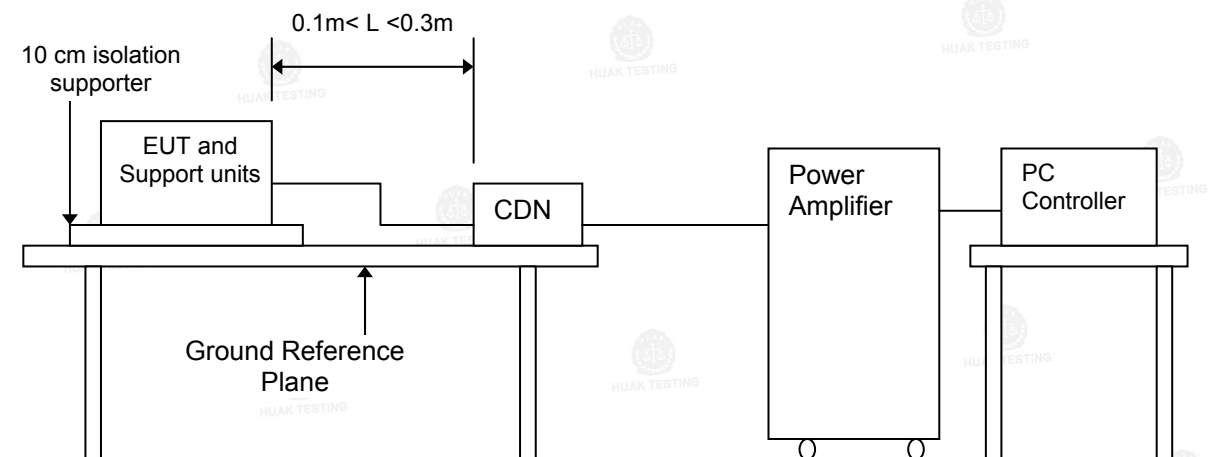

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.5.2 and EN IEC 61000-4-6 for the measurement methods.

Climatic conditions

- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS

Test Ports (Mode)	Freq. Range MHz)	Field Strength	Perform. Criteria	Results	Judgment
Input/ Output AC. Power Port	0.15 ---80	3V(rms) AM Modulated 1000Hz, 80%	A	A	PASS
Input/ Output DC. Power Port	0.15 --- 80		A	N/A	N/A
Signal Line	0.15 --- 80		A	A	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

LTE Band 1					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.42	-35	PASS
		Down Link/ speech output	-67.20	-35	PASS
		Down Link/ RXQUAL	0.0073	3	PASS

LTE Band 3					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.88	-35	PASS
		Down Link/ speech output	-67.46	-35	PASS
		Down Link/ RXQUAL	0.0057	3	PASS

LTE Band 7					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.26	-35	PASS
		Down Link/ speech output	-67.94	-35	PASS
		Down Link/ RXQUAL	0.0083	3	PASS

LTE Band 8					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.55	-35	PASS
		Down Link/ speech output	-67.74	-35	PASS
		Down Link/ RXQUAL	0.0010	3	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

LTE Band 20					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.19	-35	PASS
		Down Link/ speech output	-67.44	-35	PASS
		Down Link/ RXQUAL	0.0037	3	PASS

LTE Band 28					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.68	-35	PASS
		Down Link/ speech output	-67.01	-35	PASS
		Down Link/ RXQUAL	0.0083	3	PASS

LTE Band 38					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.75	-35	PASS
		Down Link/ speech output	-67.20	-35	PASS
		Down Link/ RXQUAL	0.0093	3	PASS

LTE Band 40					
Frequency	Antenna Polarity	Mode	Speech output Reference levels/RXQUAL Test Result	Speech output Reference levels/RXQUAL Limit	Result
0.15-80	H/V	Up Link /speech output	-64.81	-35	PASS
		Down Link/ speech output	-67.49	-35	PASS
		Down Link/ RXQUAL	0.0055	3	PASS


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4.1.11. Voltage Dips and Interruptions

LIMIT

Please refer to EN IEC 61000-4-11

TEST CONFIGURATION

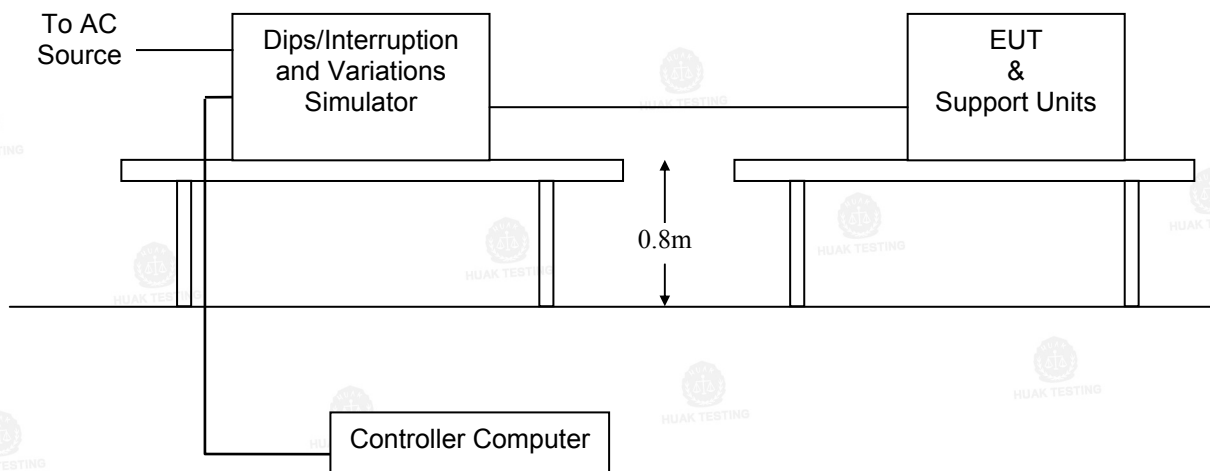

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.7.2 and EN IEC 61000-4-11 for the measurement methods

Climatic conditions


- ambient temperature : 25°C
- relative humidity: 55%
- atmospheric pressure: 960 mbar

TEST RESULTS


Interruption & Dips	Duration (ms)	Perform Criteria	Results	Judgment
Voltage dip 0%	10	B	A	PASS
Voltage dip 0%	20	B	A	PASS
Voltage dip 70%	500	C	A	PASS
Voltage dip 0%	5000	C	C	PASS

5. Test Set-up Photos of the EUT

Radiated Emission (30MHz-1GHz)

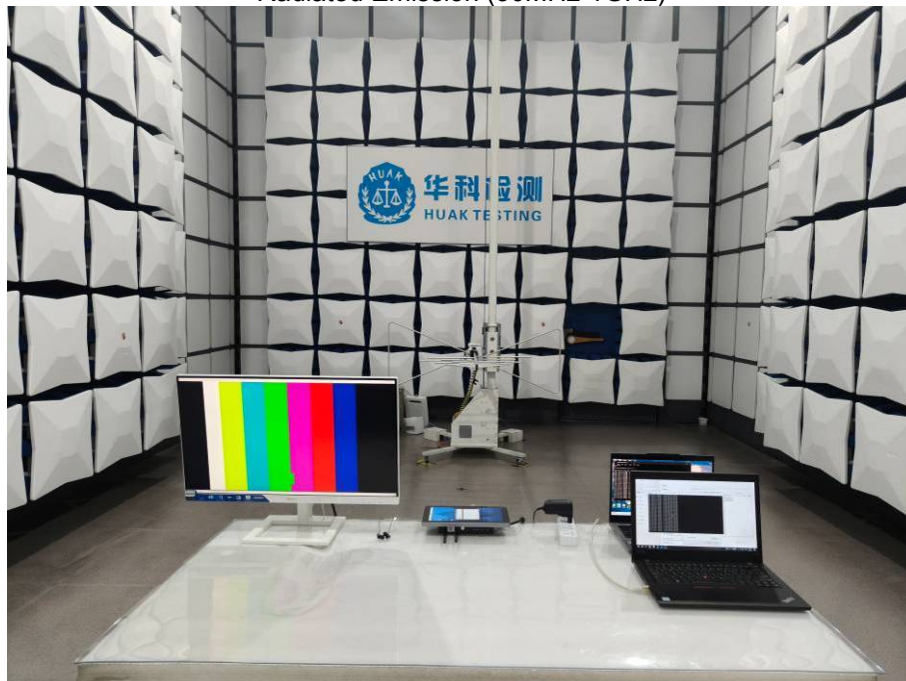

Radiated Emission (1GHz-6GHz)

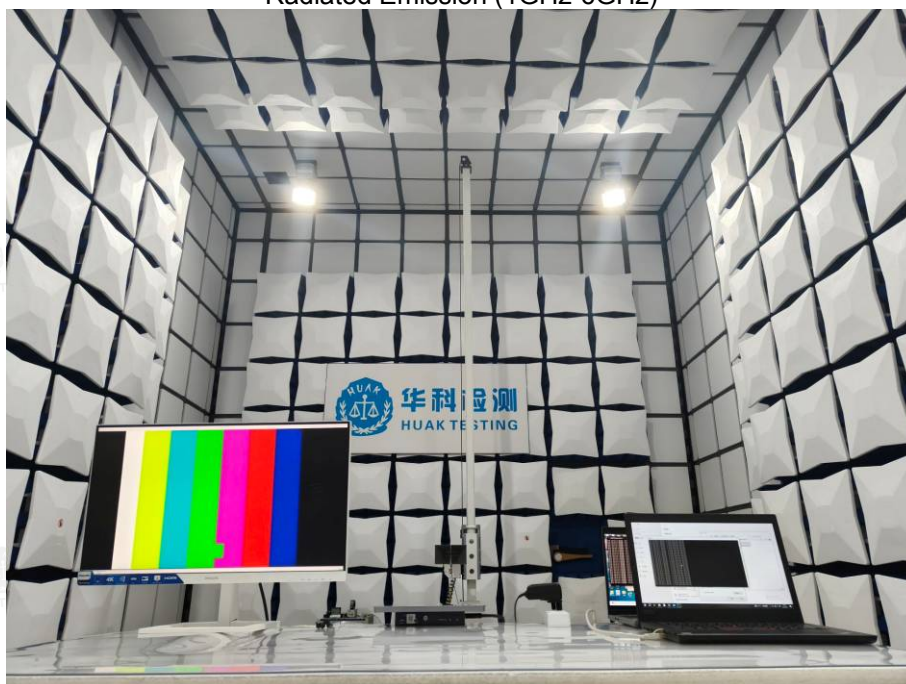

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Conducted Emission



Conducted Emission (Telcommunication Ports)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Flicker




Electrostatic Discharge




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

EFT & Surge & Voltage Dips

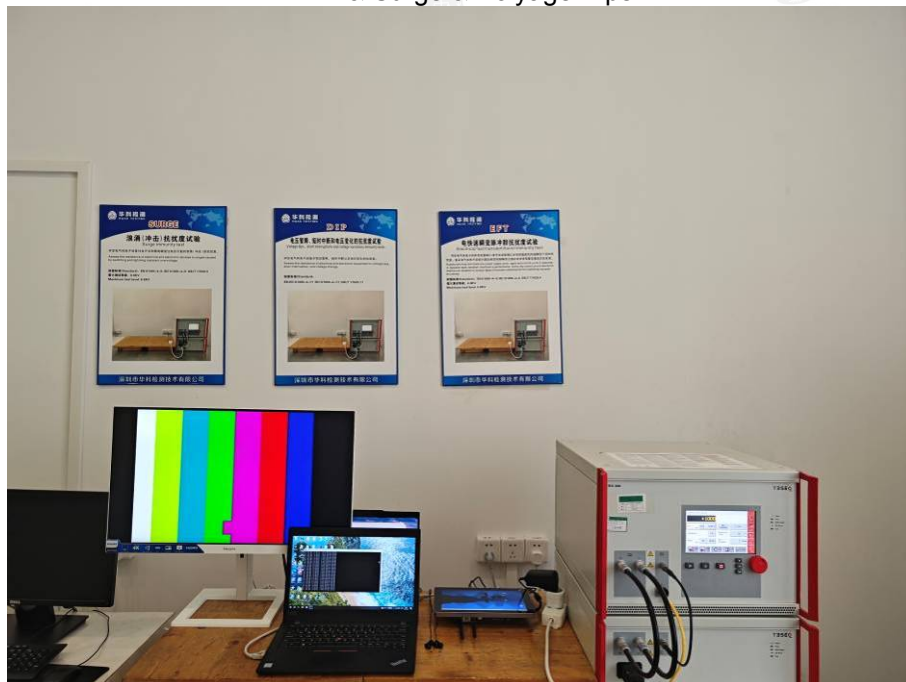


RF- Common

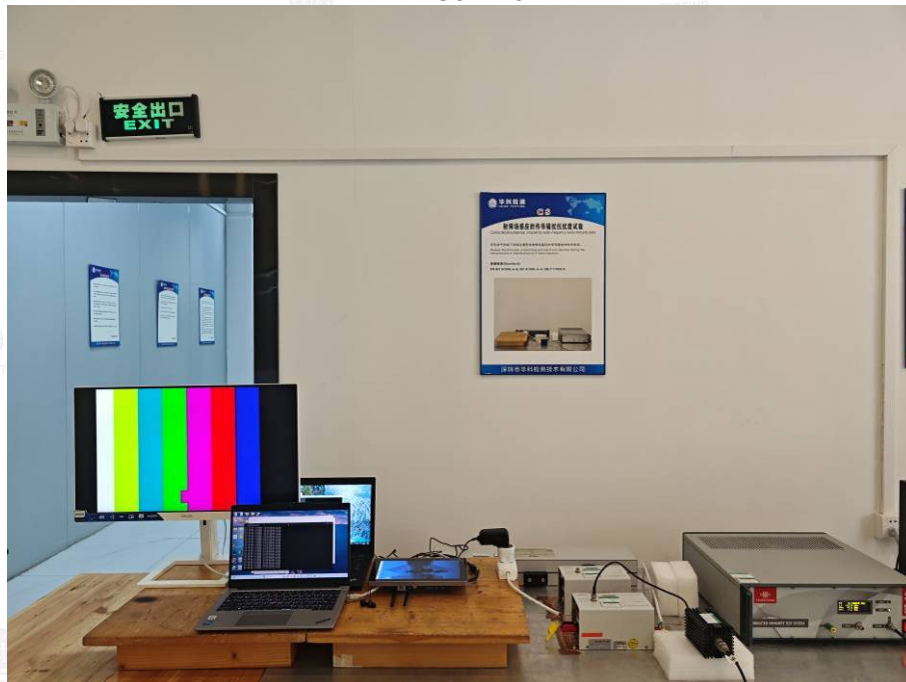


6. PHOTOS OF THE EUT



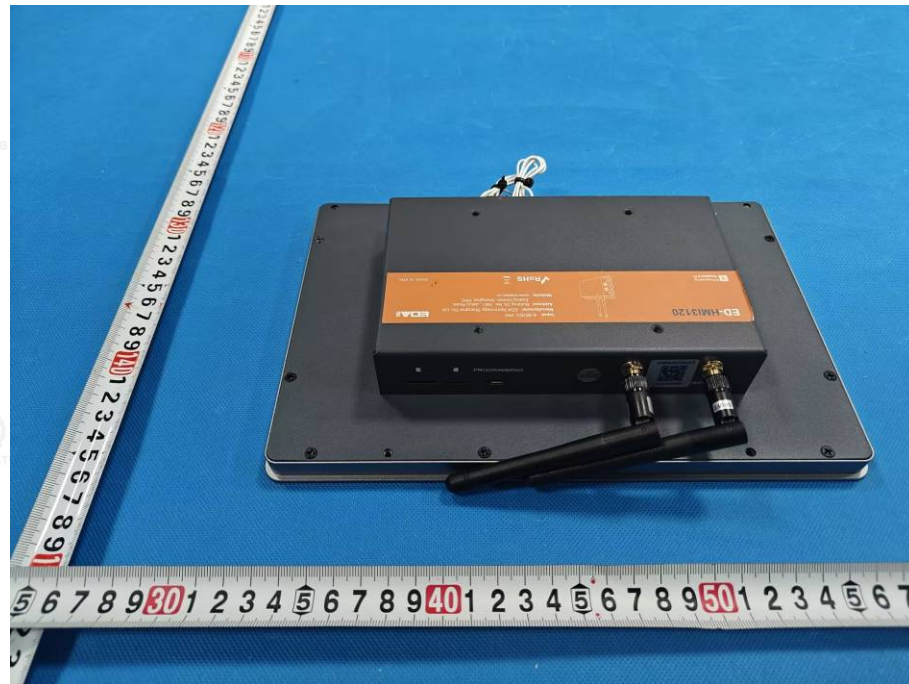



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

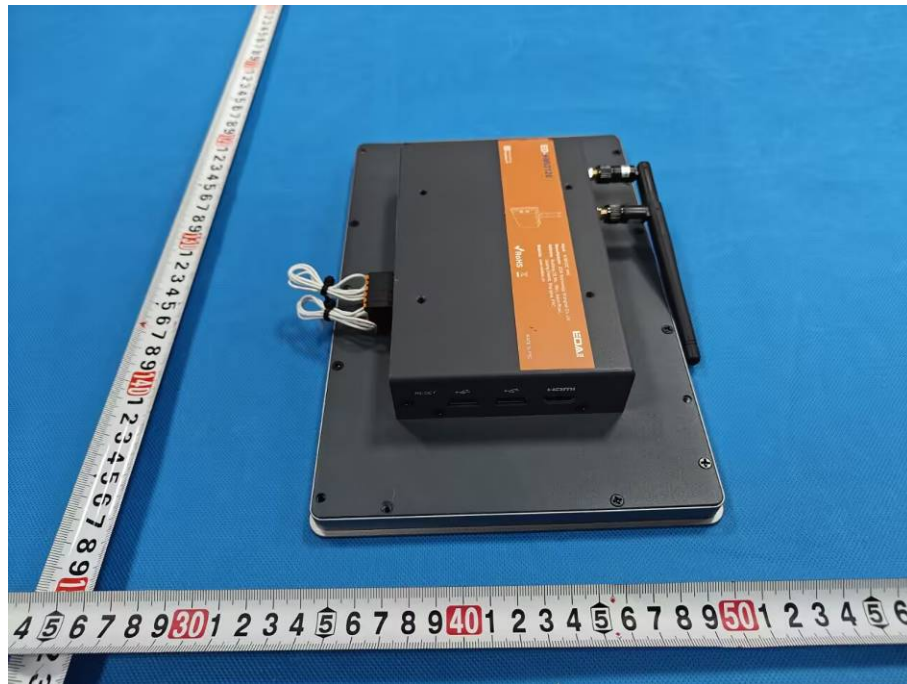

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

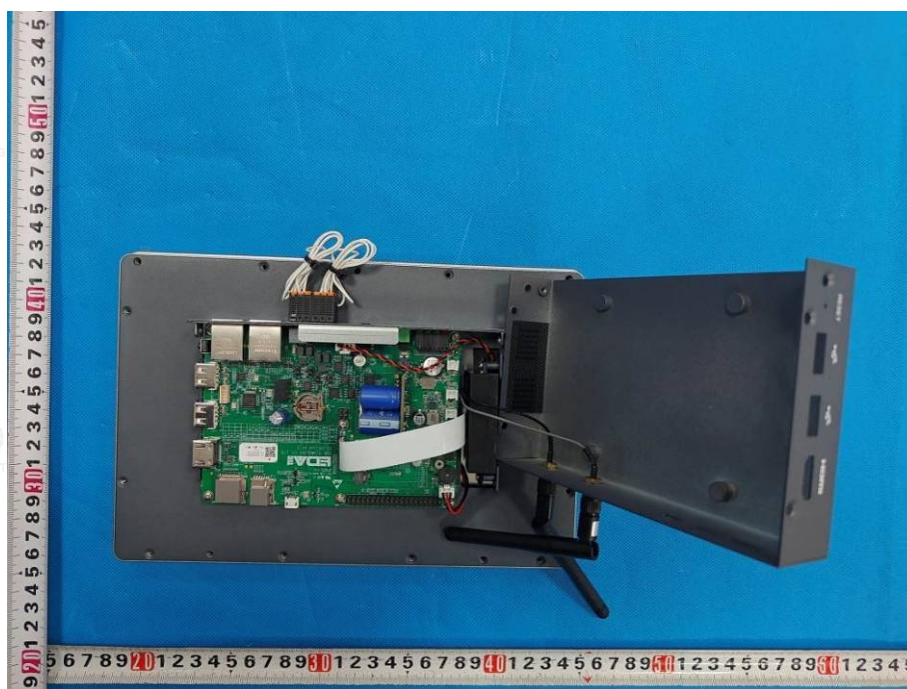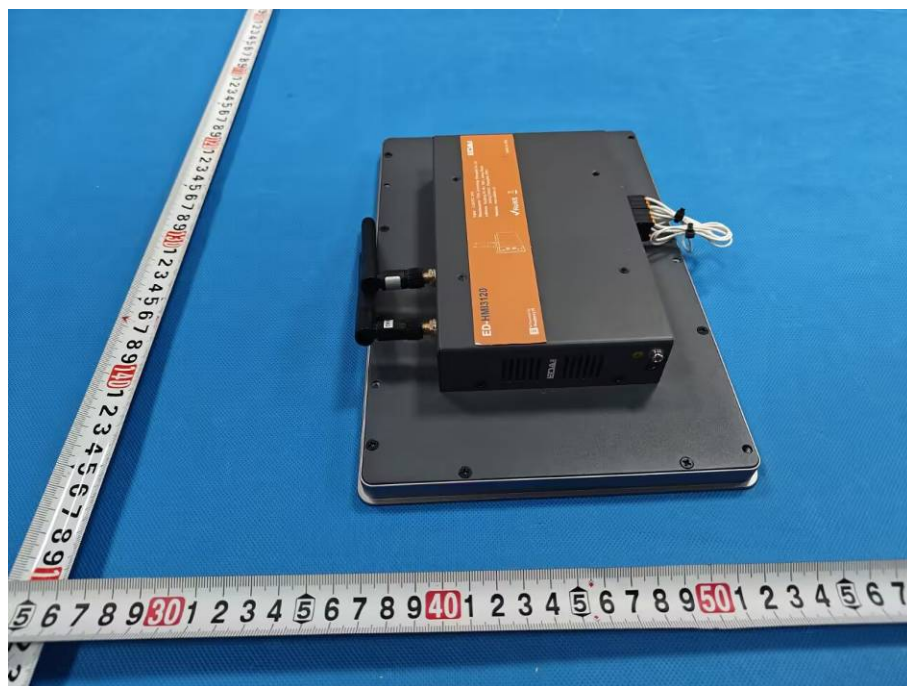

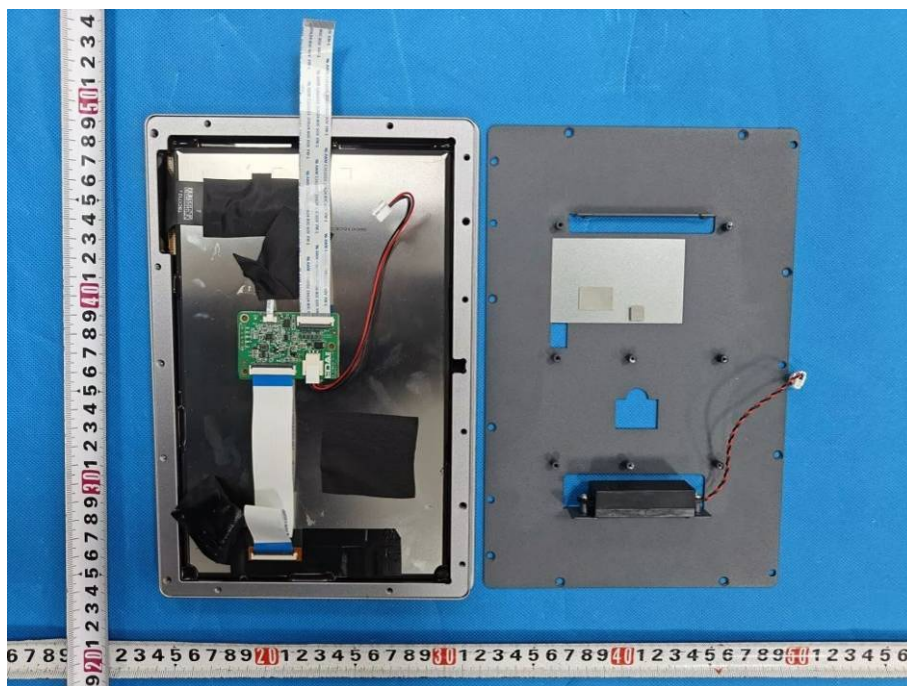



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

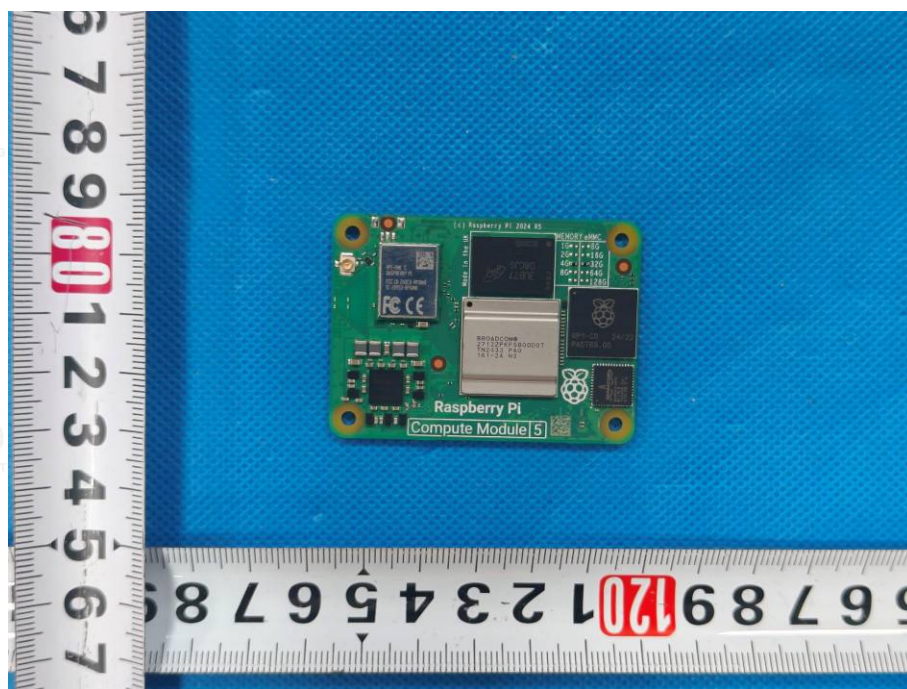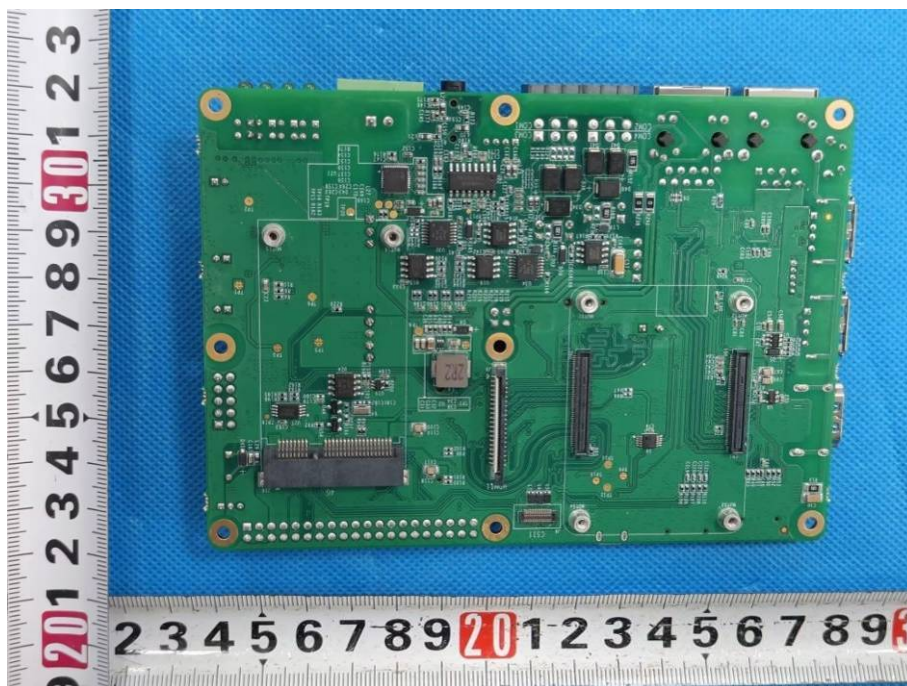

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

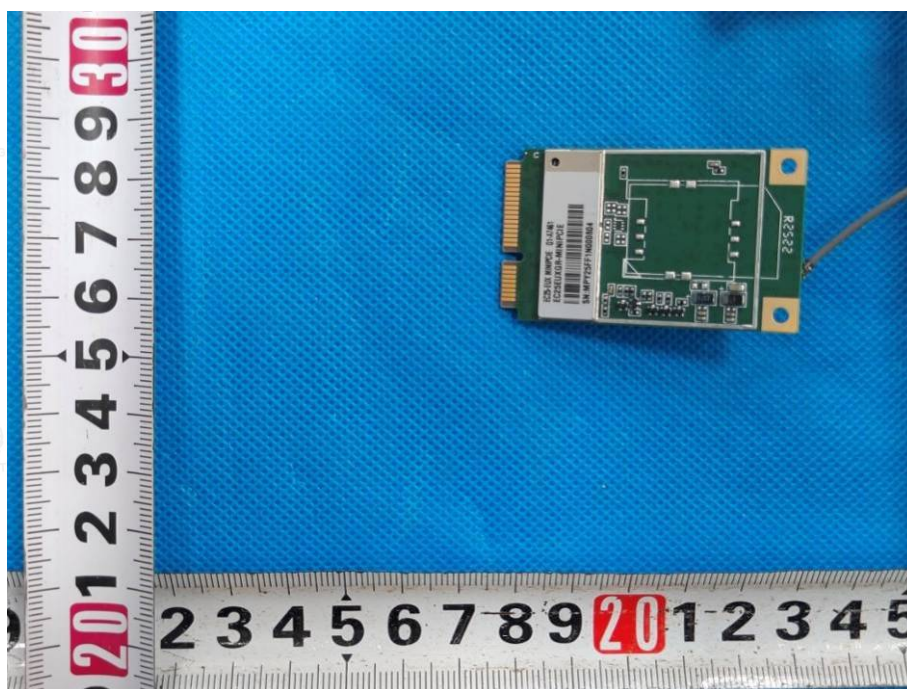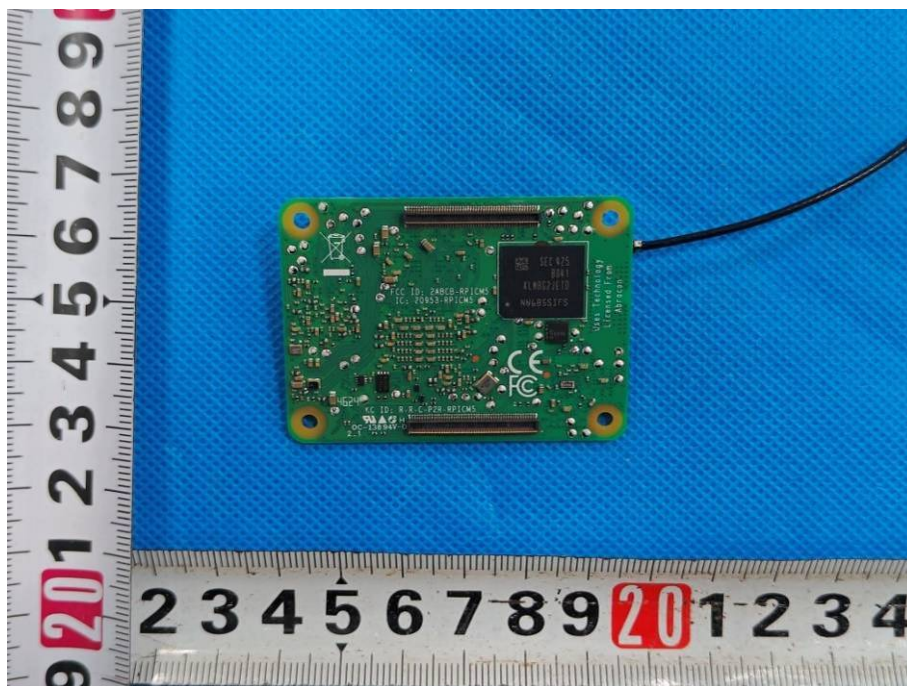

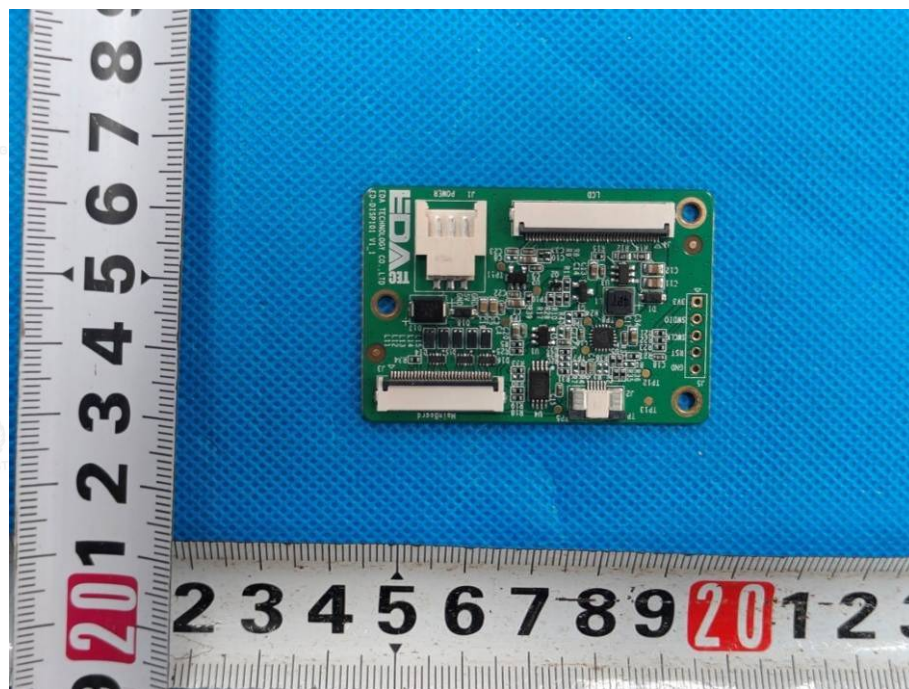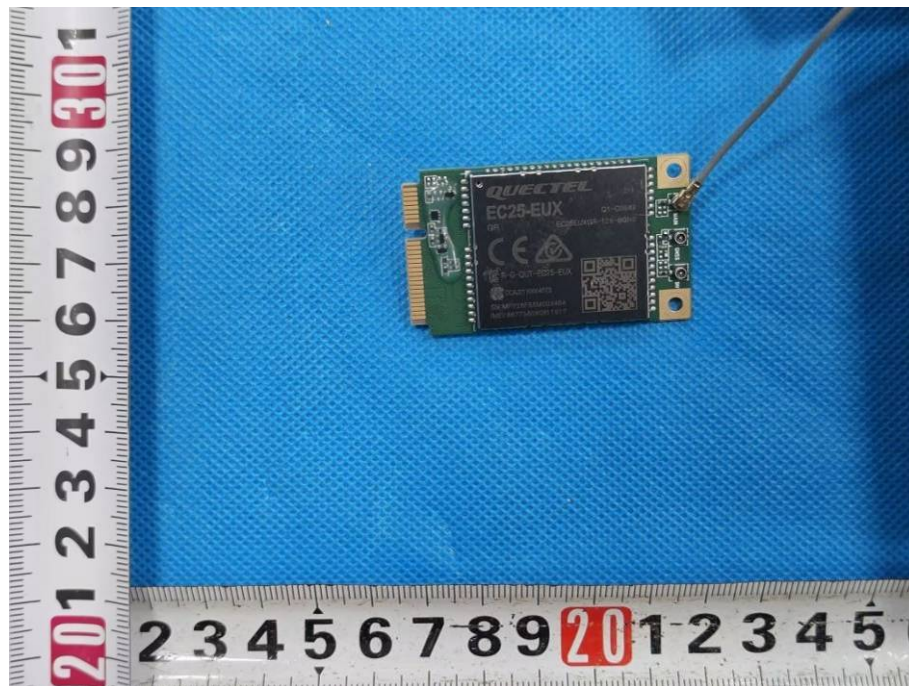

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

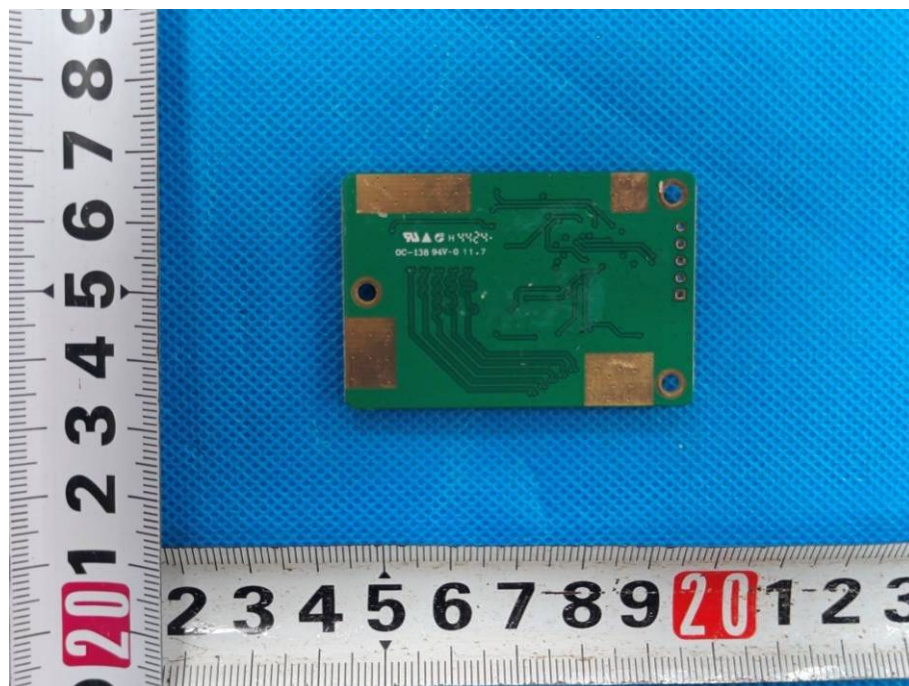

.....End of Report.....

